


**High/Low**

8. **Mark** a diagonal line on the wrong side of the **(16) 2 ¼" Dark Green squares**.
9. **Position Dark Green square** on the opposite corner of your sidekick unit right sides together with the line going across the corner. Align the raw edges.
10. **Stitch** on the line, **trim** seams ¼" from the stitching lines, and **press** away from base unit.




8. Mark




9 &amp; 10. Position, Stitch, Trim and Press


11. **Position** the **V Block®** tool on the unit, lining up the side triangle seam with the guideline on the tool. Position the intersection of the two seamlines where the guidelines on the tool intersect. The seam on the folded corner will not line up with the guideline on the tool. Align the **3" Finished Size** measurement with the seam lines. **Trim** the first two sides.
12. **Rotate** the fabric unit 180° and line up the **V Block®** tool. Align the 3 ½" cut size measurement with the previously trimmer edges and "X" with the sewn seam line intersections. **Trim** the last two remaining sides.

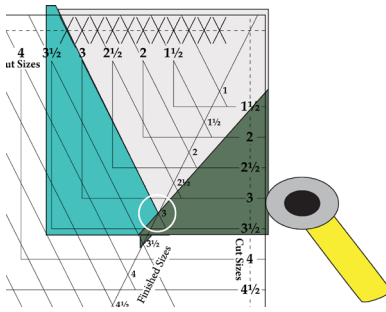

11. Position and Trim

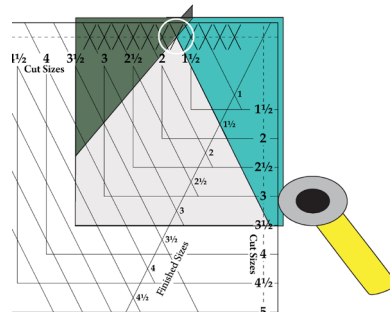

12. Rotate and Trim

Make 16 -  
3 ½" High/Low Units

13. **Repeat** steps 1-8 to **make (16) 3 ½" High/Low units**.

Learn more about this technique, from the **SideKick & High/Low Technique Sheet**. \*\*